

WOOD GLOSS

TECHNICAL DATA SHEET

Product description

Transparent polyurethane bi-component glossy varnish. Exceptional resistance to atmospheric agents and marine environment. Excellent expansion and resistance to abrasion. It intensifies the beauty of the wood, without giving problems of decline in the film of paint over time. Particularly suitable for the treatment of visible wood surfaces both inside and outside. Not suitable for substrates subject to continuous immersion. Applied in several coats, it allows excellent results over time in conditions of very aggressive marine or industrial environment.

Product information

Finish	Glossy	
Colour	Colourless .001	
Solids (by volume)	ASTM D2369	40 ± 2%
Specific gravity	UNI EN ISO 2811-1	1,02 ÷ 1,07 g/cm ³
Flash point	UNI EN ISO 13736	33 °C
VOC (calculated average content)	ISO 11890-2/2006	575 g/l
Packaging	0,75 Lt	

Application and use

SURFACE PREPARATION

New wood or renewed : the support must be dry and the moisture of the wood must not exceed 18%. All surfaces to be painted must be clean, dry and free of contaminants. Sand down with P80-P120 paper. Before proceeding with the application of the products, blow with clean and dry air, to remove any residue of sanding and dirt. Apply the primer with one coat of Fibrodur, then apply the first coats of WOOD GLOSS diluted 10 - 15%. Proceed with the following coats (3 - 5 coats) in the same way.

Wood already varnished: sand to remove traces of varnish during stripping or to level the surface; apply the first coats of WOOD GLOSS diluted with 5%, proceed with the next coats (2 - 4 coats) in the same way.

N.B. Between one coat and the following abrade with Scotch Brite fine (grey)

Rev. January 2019








1

WOOD GLOSS

TECHNICAL DATA SHEET

High resistance cycle: on new or bare wood apply two coats of Resin 2000 sanding between one coat and the other.

Application data

Mixing ratio by volume		4:1
Mixing ratio by weight		80 w/w 20 w/w
Base (comp. A) 6706.001 Hardener (comp. B) 6706.999		3 h at 20 °C
Pot-life NB: do not use the product once the Pot-Life time has passed		3 h at 20 °C
Thinner/Cleaning tools NB: the indicated dilution % is considered on the catalyzed product		6780 – Brush (20% max) 6780 – Conventional spray (20% max)
Application methods		Conventional Pressure 3,5 bar Nozzle 1,2 – 1,5 mm
		
Dry film thickness per coat	Standard range application	15 – 20 µm
	Recommended	20 µm
Wet film thickness per coat	Standard range application	40 – 50 µm
	Recommended	50 µm
Theoretical coverage	20 µm	20 m ² /l
Practical coverage (loss by 30%)	20 µm	14 m ² /l
Recommended primers	Fibrodur – Resina 2000	

WOOD GLOSS

TECHNICAL DATA SHEET

Notes	The product is provided in two tins to be mixed entirely and carefully before usage. The eventual dilution must be done after mixing the two components. The physical data of two-component products are related to the components after they have been mixed together.
-------	---

Drying time

Temperature °C		10		15		20		30	
		Min	Max	Min	Max	Min	Max	Min	Max
Coverage wet on wet				8 h	3 days	6 h	2 days	6 h	2 days
Sanding				36 h		24 h		18 h	
Full curing				8 days		7 days		5 days	

CONDITIONS DURING THE APPLICATION

In order to avoid the formation of condensation, the temperature of the surface should be at least 3 °C above dew point. During the application and curing the min. ambient temperature must not be lower than 15 °C or higher than 30 °C; substrate temperature must not be lower than 10 °C, since curing is remarkably reduced at lower temperatures. Application is not advisable when relative humidity exceeds 80%. The term-hygrometric survey should be carried out near the surface to be coated. Make sure there is enough ventilation when the application takes place in closed areas.

WOOD GLOSS

TECHNICAL DATA SHEET

Storage

It is recommended to avoid exposure to air and extreme temperatures. To maximize the shelf life in the can, it is good to check that the container is well closed during the storage and the temperature is between 10 °C and 35 °C. Avoid exposure to direct sunlight.

Safety rules

Observe the provisions of DPR 303 and 547. Avoid contact with the skin, for example. Operate in well ventilated places and, if in closed areas, use vacuum cleaners, fans and air conveyors. During the application, use appropriate protections (masks, gloves, glasses, etc.). Before using, read sections 7-8 of the SDS.


INSTRUCTIONS FOR THE DISPOSAL OF PRODUCTS AND PACKAGING

Empty packaging that contains the products: Dispose of empty packaging according to the requirements of the waste disposal law, for example by taking them to the recycling center.

Packages containing the unused products: Dispose of the unused product in accordance with the law of disposal of such waste, by taking it to a recycling center, recycling of packaging is prohibited in this case. Do not empty into drains or water courses. Product packaging must be kept indoor and the temperature in the storage place must be between 10° C and 35° C. Do not expose to sunlight.

WOOD GLOSS

TECHNICAL DATA SHEET

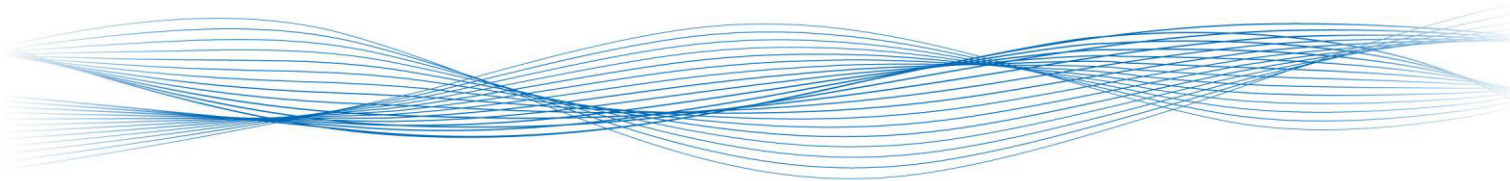

Notes

The values indicated in the present technical sheet can have slight variations from one batch to another. The applied product must not come in contact with water, chemicals or subjected to mechanical stress before the curing is complete. The wet film thickness refers to the undiluted product. In case of dilution, this value increases. The above information is the result of accurate laboratory tests and practical experience; however, since the product is predominantly used outside the manufacturer's control, Boero Bartolomeo S.p.A. can only guarantee its quality. The information contained in this sheet may be subject to revision by the Company. For clarification, updates or further information, it is recommended to contact Boero Bartolomeo S.p.A. directly. The present datasheet annuls and replaces every other precedent to this one.